

## isc Triacs

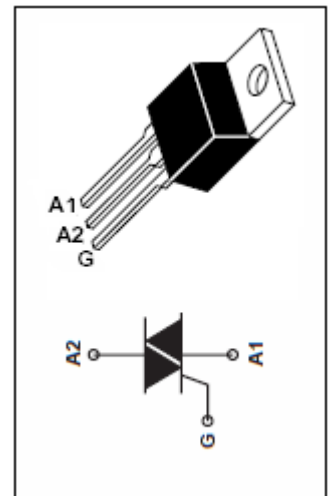
## TIC206D

## FEATURES

- With TO-220 package
- Sensitive Gate Triacs
- Glass Passivated
- Max  $I_{GT}$  of 5 mA (Quadrants 1~3)

ABSOLUTE MAXIMUM RATINGS( $T_a=25^{\circ}\text{C}$ )

SYMBOL	PARAMETER	MIN	UNIT
$V_{DRM}$	Repetitive peak off-state voltage	400	V
$V_{RRM}$	Repetitive peak reverse voltage	400	V
$I_{T(RMS)}$	RMS on-state current (full sine wave) $T_C=85^{\circ}\text{C}$	4	A
$I_{TSM}$	Non-repetitive peak on-state current	25	A
$T_j$	Operating junction temperature	110	$^{\circ}\text{C}$
$T_{stg}$	Storage temperature	-45~150	$^{\circ}\text{C}$
$R_{th(j-c)}$	Thermal resistance, junction to case	7.8	$^{\circ}\text{C/W}$
$R_{th(j-a)}$	Thermal resistance, junction to ambient	62.5	$^{\circ}\text{C/W}$

ELECTRICAL CHARACTERISTICS ( $T_C=25^{\circ}\text{C}$  unless otherwise specified)

SYMBOL	PARAMETER		CONDITIONS	MAX	UNIT
$I_{DRM}$	Repetitive peak off-state current		$V_D=V_{DRM}$ , $T_C=110^{\circ}\text{C}$	1.0	mA
$I_{GT}$	Gate trigger current	I	$V_{supply} = 12\text{ V}\uparrow$ ; $R_L = 10\ \Omega$ ; $t_{p(g)} > 20\ \mu\text{s}$	5	mA
		II		5	
		III		5	
		IV		10	
$I_H$	Holding current		$V_{supply} = 12\text{ V}\uparrow$ , $I_G = 0$ initial $I_{TM} = 100\text{mA}$	30	mA
$V_{GT}$	Gate trigger voltage <b>all quadrant</b>		$V_{supply} = 12\text{ V}\uparrow$ ; $R_L = 10\ \Omega$ ; $t_{p(g)} > 20\ \mu\text{s}$	2.0	V
$V_{TM}$	On-state voltage		$I_T = 8.4\text{A}$ ; $I_G = 50\text{mA}$	1.7	V