

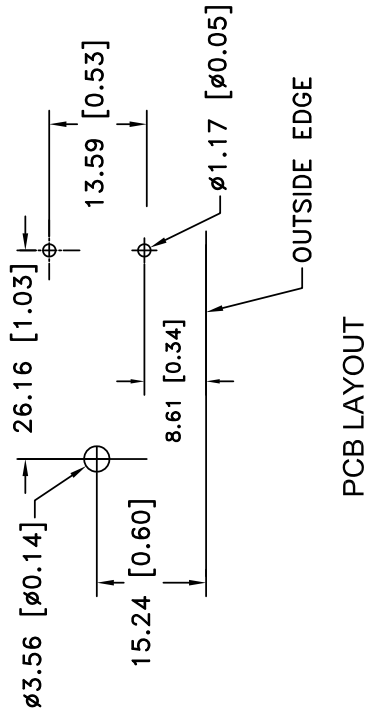


Date	SYM	REVISION RECORD	AUTH	DR. CK.
10/02/09	D	REDRAWN. 57.20 WAS 57.90	T.B.	B.S.
03/12/10	E	ADDED PCB LAYOUT	T.B.	B.S.
01/25/13	F	DIM. 26.16 WAS 29.08	T.B.	B.S.
10/17/14	G	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.

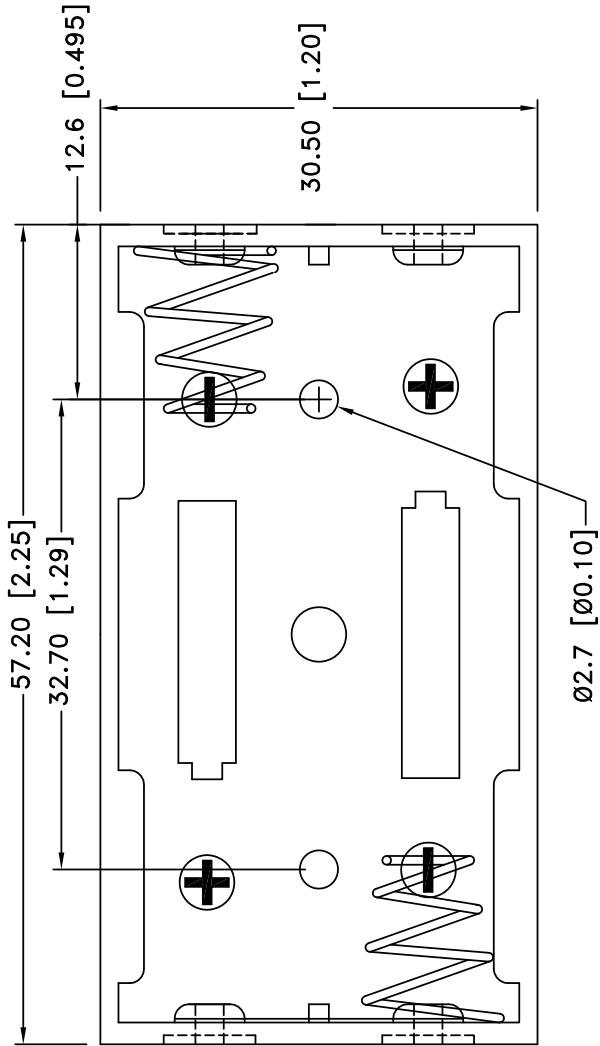

PCB LAYOUT

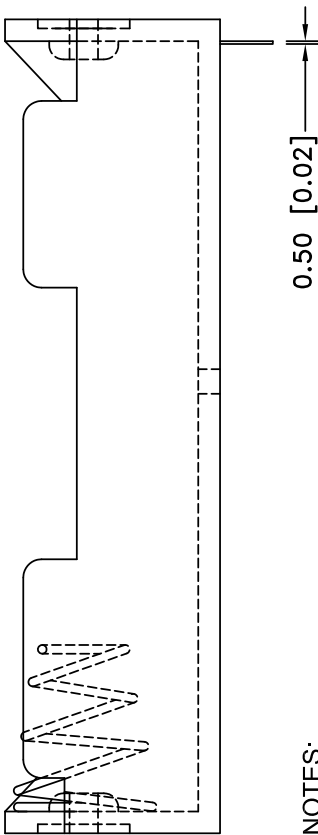

NOTES:

1. MATERIAL:  
HOUSING : BLACK POLYPROPYLENE  
FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959  
TEMPERATURE RANGE: -10°C to +100°C  
RIVETS: BRASS, NICKEL PLATED.  
SPRING: SPRING STEEL, NICKEL PLATED.  
LUGS: BRASS, NICKEL PLATED  
CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000

ROHS 2 COMPLIANT

Tolerance (Except as noted)		<div><div>MPD</div></div> Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	
decimal		Scale	Drawn By B.S.
±.5 (.020)		Approved By T.B.	
Fractional		Title	
± .8 (.030)		TWO "AA" CELL HOLDER	
Angular		Date	Drawing Number
± 3°		10/17/14	BC2AAPC