PRODUCT NUMBER

71600–YXXLF

- LEAD FREE, SEE NOTE 6
- TOTAL NB OF POSITION 04 TO 64 SEE SHEET 2
- OPTIONAL STRAIN RELIEF SEE SHEET 2

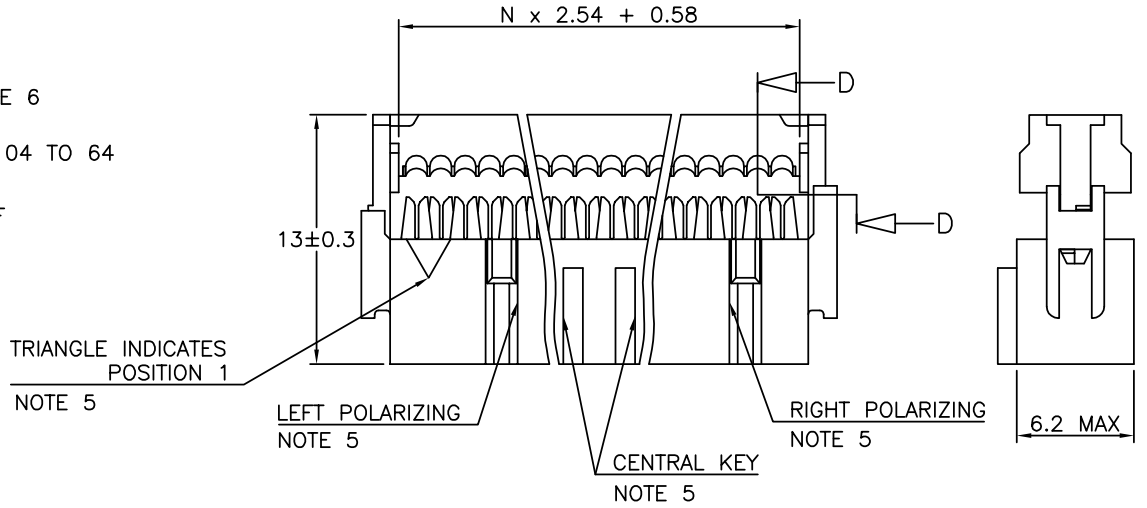

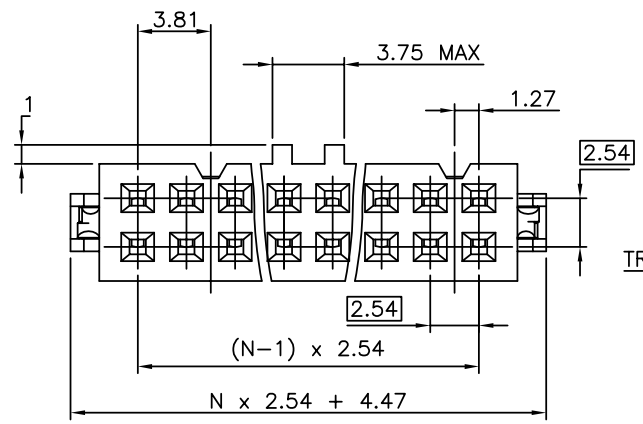

COVER ORIENTATION

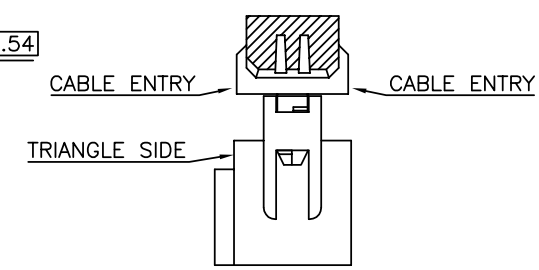

D D SECTION

NOTES:

1 – PLASTIC MAT'L : GLASS FILLED HIGH TEMPERATURE THERMOPLASTIC. UL94V–0 COLOR: GREY

2 – PIN MATERIAL : PHOSPHOR BRONZE

3 – PRODUCT PACKAGED IN TUBES.

4 – TO DETERMINE DIMENSIONS :
N = NUMBER OF POSITIONS PER ROW
EXAMPLE : 8 POS N x 2.54 = 20.32mm

5 – 2x5, 2x6, 2x7 HAVE NO LEFT POLARIZING SLOT.
– 2x2, 2x3 WITH CENTRAL KEY HAVE NO TRIANGLE, NO LEFT AND RIGHT POLARIZING SLOT.
– 2x2 WITHOUT CENTRAL KEY HAS NO LEFT AND RIGHT POLARIZING SLOT.
– 2x3, 2x4 WITHOUT CENTRAL KEY HAVE NO LEFT POLARIZING SLOT
– 2x4 WITH CENTRAL KEY HAVE NO LEFT AND RIGHT POLARIZING SLOT

6 – THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS PER GS–22–008.
PACKAGING SPECIFICATION AS PER GS–14–920.

mat'l. code SEE NOTES				surface ISO 1302	tolerance ISO 406 ISO 1101	projection	product family 2.54MM IDC
ltr	ecn no	dr	date	tolerances unless otherwise specified			title QUICKIE III FEM 0.76µm Au
AP	F12–0046	LMU	12.04.25	angles	linear X.X ±0.3	mm	
AR	B–17851	LMU	14.06.05		X.XX ±0.13		
					X.XXX ±0.05	scale 5:1	
AK	F05–0180	LMU	05.04.22	dr	D.LE	01.01.24	dwg no 71600 sheet 1 of 2 size A3
AL	F06–0270	LMU	06.09.12	engr	P.NZ	01.01.24	
AM	F06–0274	LMU	06.09.25	chr	JF.N	01.01.24	
AN	F09–0233	LMU	09.12.15	appd	P.NZ	01.01.24	type CUSTOMER Drawing
sheet index	revision	AR	AF				
	sheet	1	2				

FCIconnect.com
Copyright FCI

STRAIN RELIEF OPTION AVAILABILITY	Nbr OF POSITIONS
1/6	04
0/1/2/3/6	06
0/1/2/3/6	08
0/1/2/3/6	10
0/1/2/3/6	14
0/1/2/3/6	16
0/1/2/3/6	18
0/1/2/3/6	20
0/1/3	24
0/1/2/3/6	26
0/1/2/3/6	30
0/1/2/3/6	34
0/1/2/3/6	40
0/1/2/3/6	50
0/1/2/3/6	60
0/1/2/3/6	64
PLATING 0.76µm GOLD ON CONTACT AREA 1.27 µm Ni REMAINDER OF PRODUCT	

624
304
204 / 224
004
DASHES NOT AVAILABLE

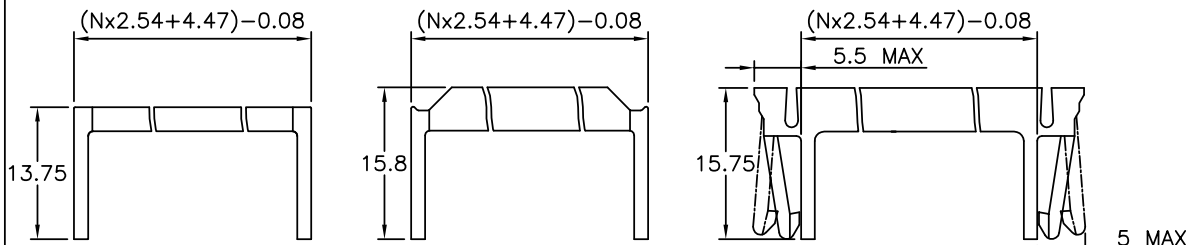

LOW PROFILE STRAIN RELIEF

STANDARD STRAIN RELIEF

LATCHING STRAIN RELIEF FOR SLIM HEADER



WITHOUT STRAIN RELIEF



WITH LOW PROFILE STRAIN RELIEF



WITH STANDARD STRAIN RELIEF



WITH LATCHING STRAIN RELIEF

PRODUCT NUMBER	CENTRAL KEY: WITH	CENTRAL KEY: WITHOUT	STRAIN RELIEF: STANDARD	STRAIN RELIEF: WITHOUT	STRAIN RELIEF: LOW PROFILE	STRAIN RELIEF: LATCHING
71600−6YYLF	●					●
71600−3YYLF		●	●			
71600−2YYLF	●				●	
71600−1YYLF	●			●		
71600−0YYLF	●		●			

mat'l. code				surface ISO 1302	tolerance ISO 406 ISO 1101	projection	product family
							QUICKIE
ltr	ecn no	dr	date	tolerances unless otherwise specified			title
AF	B−17851	LMU	14.06.05	angles / linear		mm	IDC RECEPT DR
AA	F10199	GCO	01.04.26			scale N/A	
AB	F03019	DLE	03.01.23	dr D.LE	01.01.24		dwg no 71600 — sheet 2 of — — size A3
AC	F05−0180	LMU	05.04.22	engr P.NZ	01.01.24		
AD	F06−0270	LMU	06.09.12	chr JF.N	01.01.24		
AE	F06−0274	LMU	06.09.25	appd P.NZ	01.01.24		type CUSTOMER Drawing
sheet index	revision sheet						

FCIconnect.com
Copyright FCI

form: A3

PDS: Rev :AR STATUS:Released Printed: Jun 06, 2014